

Fiche technique

Chapiteau



Tent

Ground diameter: 26m

Total installation area: 30.6m by 30.6m.

Number of seats: 253 seats or 247 seats + 2 PRM

Installation of the tent :

- installation on stabilized, flat and horizontal ground of 30.6m x 35.47m minimum: particular attention to the central part of 18m in diameter where the track and the stand rest and must not exceed 1% slope (10 cm for 10 m),
- land clear of any obstacles (electrical and telephone lines, trees, street furniture, etc.) and guaranteed access for heavy goods vehicles of 10.5m + trailer.
- basement free of any pipes (water, electricity, gas, sewers, etc.).

Technical requests:

- 63 A TETRA power supply (marquee), arrival at the tent.
- in cold periods, provide fuel oil for a heat gun (1000 l tank, continuous consumption: 14 l/h),
- a Manitou, for assembly and dismantling days. (minimum lifting capacity 2tons at 4m height)
- A Makita HR5212C type SDS-max drill or equivalent.

Logistical requests:

- access and parking for 1 19t truck and 1 26t truck (height of 4.10m.) and 1 van + trailer.
- sanitary facilities, showers and private toilets (no squat toilets) in good condition, clean and with hot water, on the site of the marquee and camp or 50 meters maximum, accessible 24 hours a day
- A trash container is necessary on the site where the tent is located
- lodge catering: fresh fruit (bananas, oranges/apples), dried fruit, energy bars, small cakes with and without gluten, water, juice, tea/coffee on (dis)assembly and performance days. (enough quantity for 15 people)



Personnel requests:

- 1 site manager (available from arrival to departure company): reference person for setting up the tent, parking, electrical connection, etc., must be present at the start of each work session (assembly, performances, dismantling)
- 4 technicians for the assembly and dismantling of the tent (intense physical work): see the typical schedule



Typical schedule:


day	Time	Activity	Demande en matériel et personnel
D-4	16h-20h	measurement and tracing	1 Site manager
D-3	9h-13h 14h-18h	Assembly of the tent	4 people for 2 services (8h) + Manitou + Perforator + Provide electricity
D-2	9h-13h 14h-18h	Assembly of the tent	Provide electricity for the tent + Manitou 4 people for 2 services (8h)
D-1		Training	
Day of the Show		Training and Show	1 Site manager
D+1	9h-13h 14h-18h	Disassembly	4 people for 2 services (8h) + Manitou
D+2	9h-13h	Disassembly	4 people for 1 services (4h) + Manitou

Administrative authorizations:


The host venue must request a municipal decree before the first performance, authorizing the installation of the tent, parking on the public highway and the presentation of the show to the public.

Design

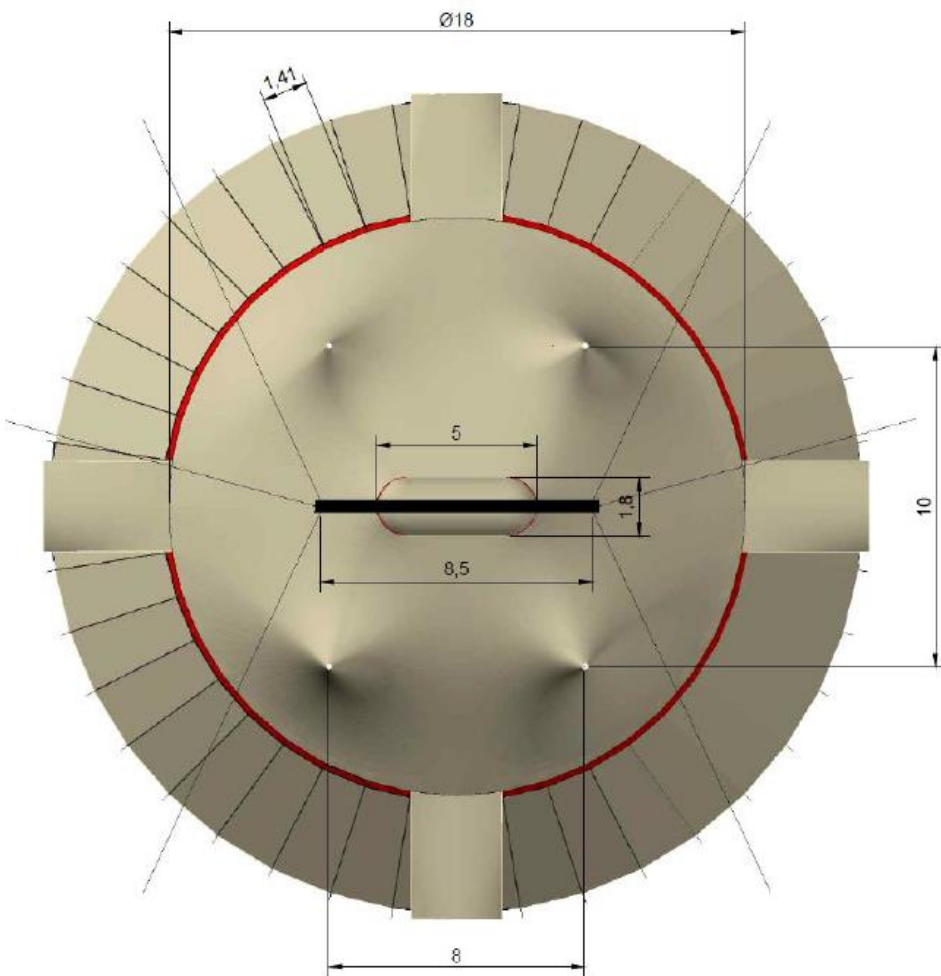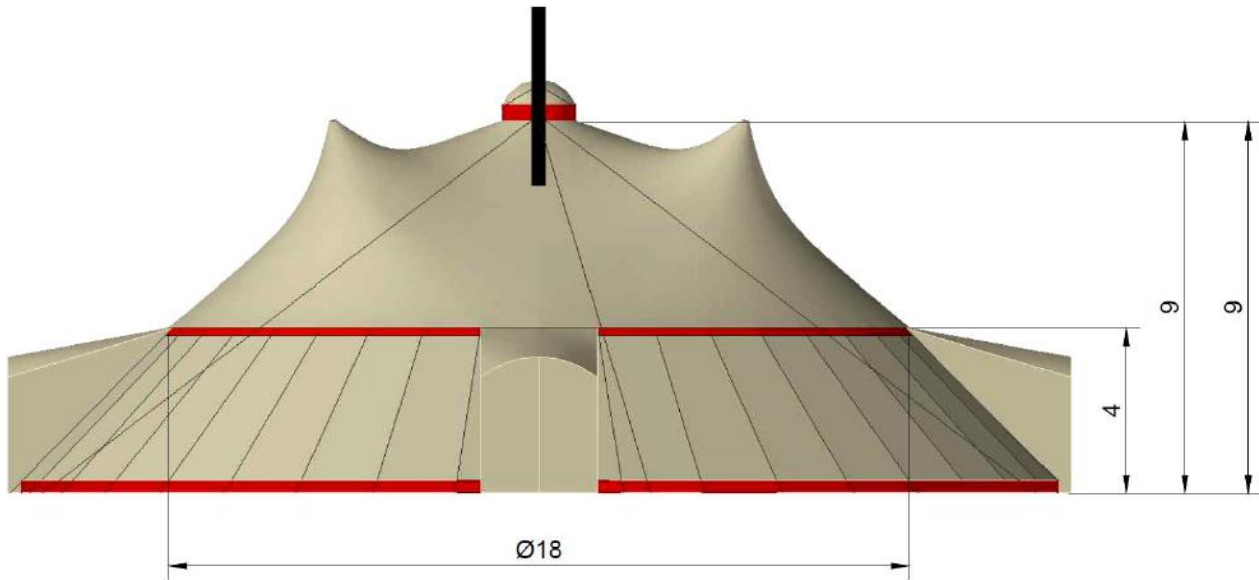

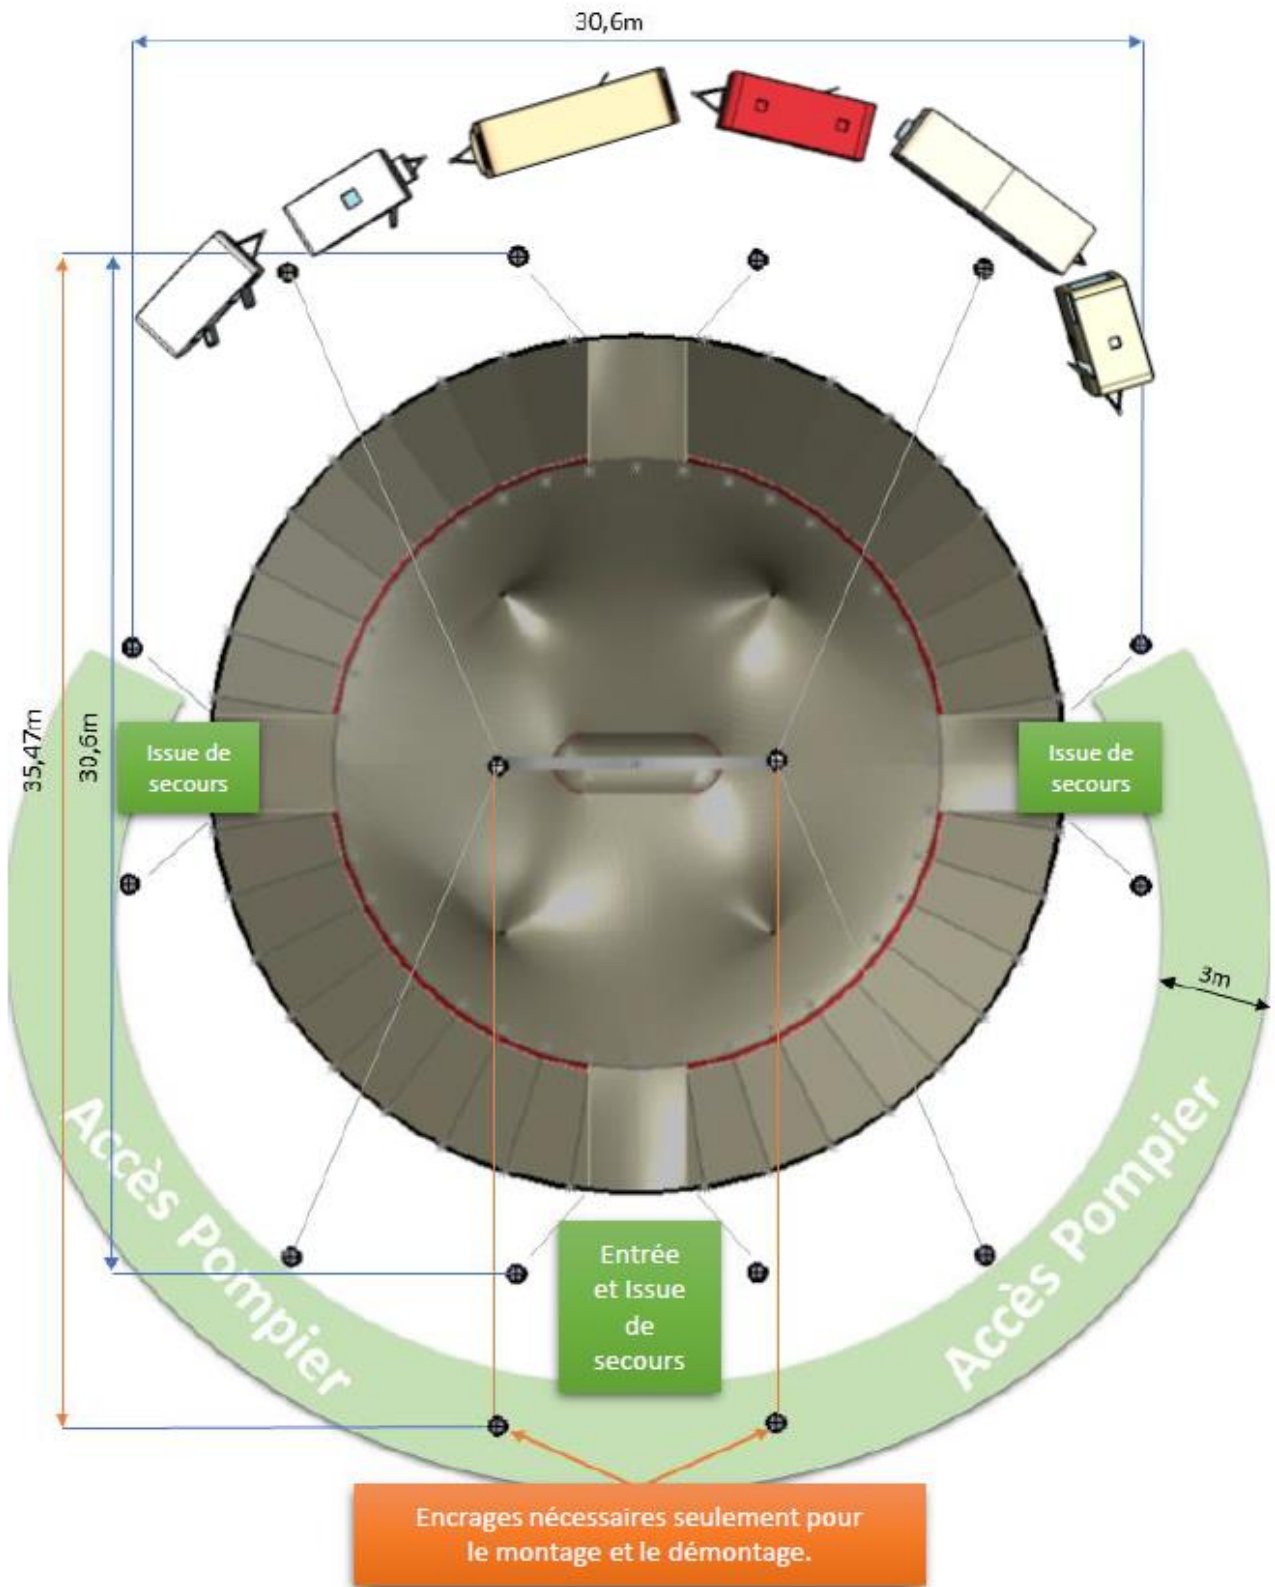

Plan d'évacuation

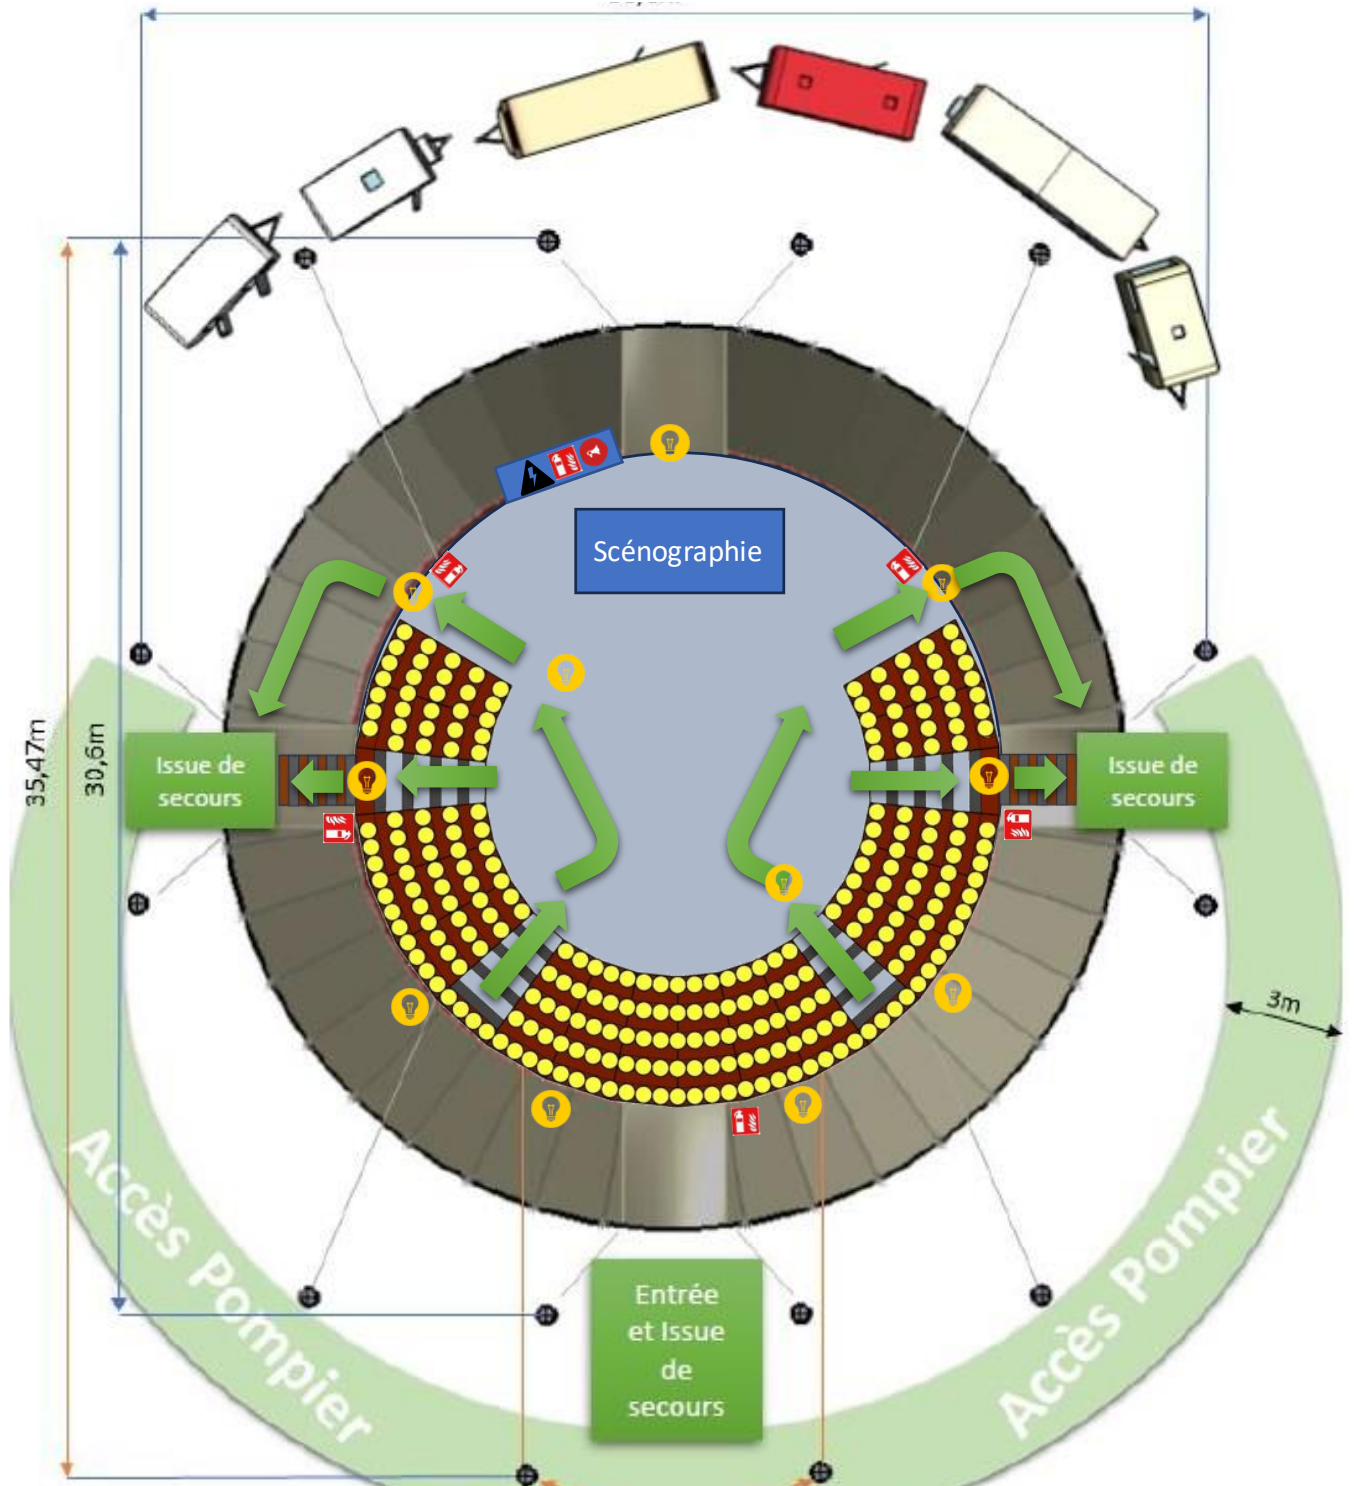

Extincteur	Coupure électrique générale
Mégaphone, sirène et anémomètre	Bloc autonome d'éclairage de sécurité



CONTACT

ADMINISTRATIVE MANAGEMENT:

Caroline MALINSKY : 0033 6 03 04 24 28

circo.zoe@gmail.com

TECHNICAL DIRECTION:

Yoann BRETON : 0033 6 86 59 29 32

yb.light@gmail.com

Adresse:

1975 avenue DE LA REPUBLIQUE

06550 LA ROQUETTE SUR SIAGNE

circo.zoe@gmail.com

N° SIRET: 801 910 464 000 24 /